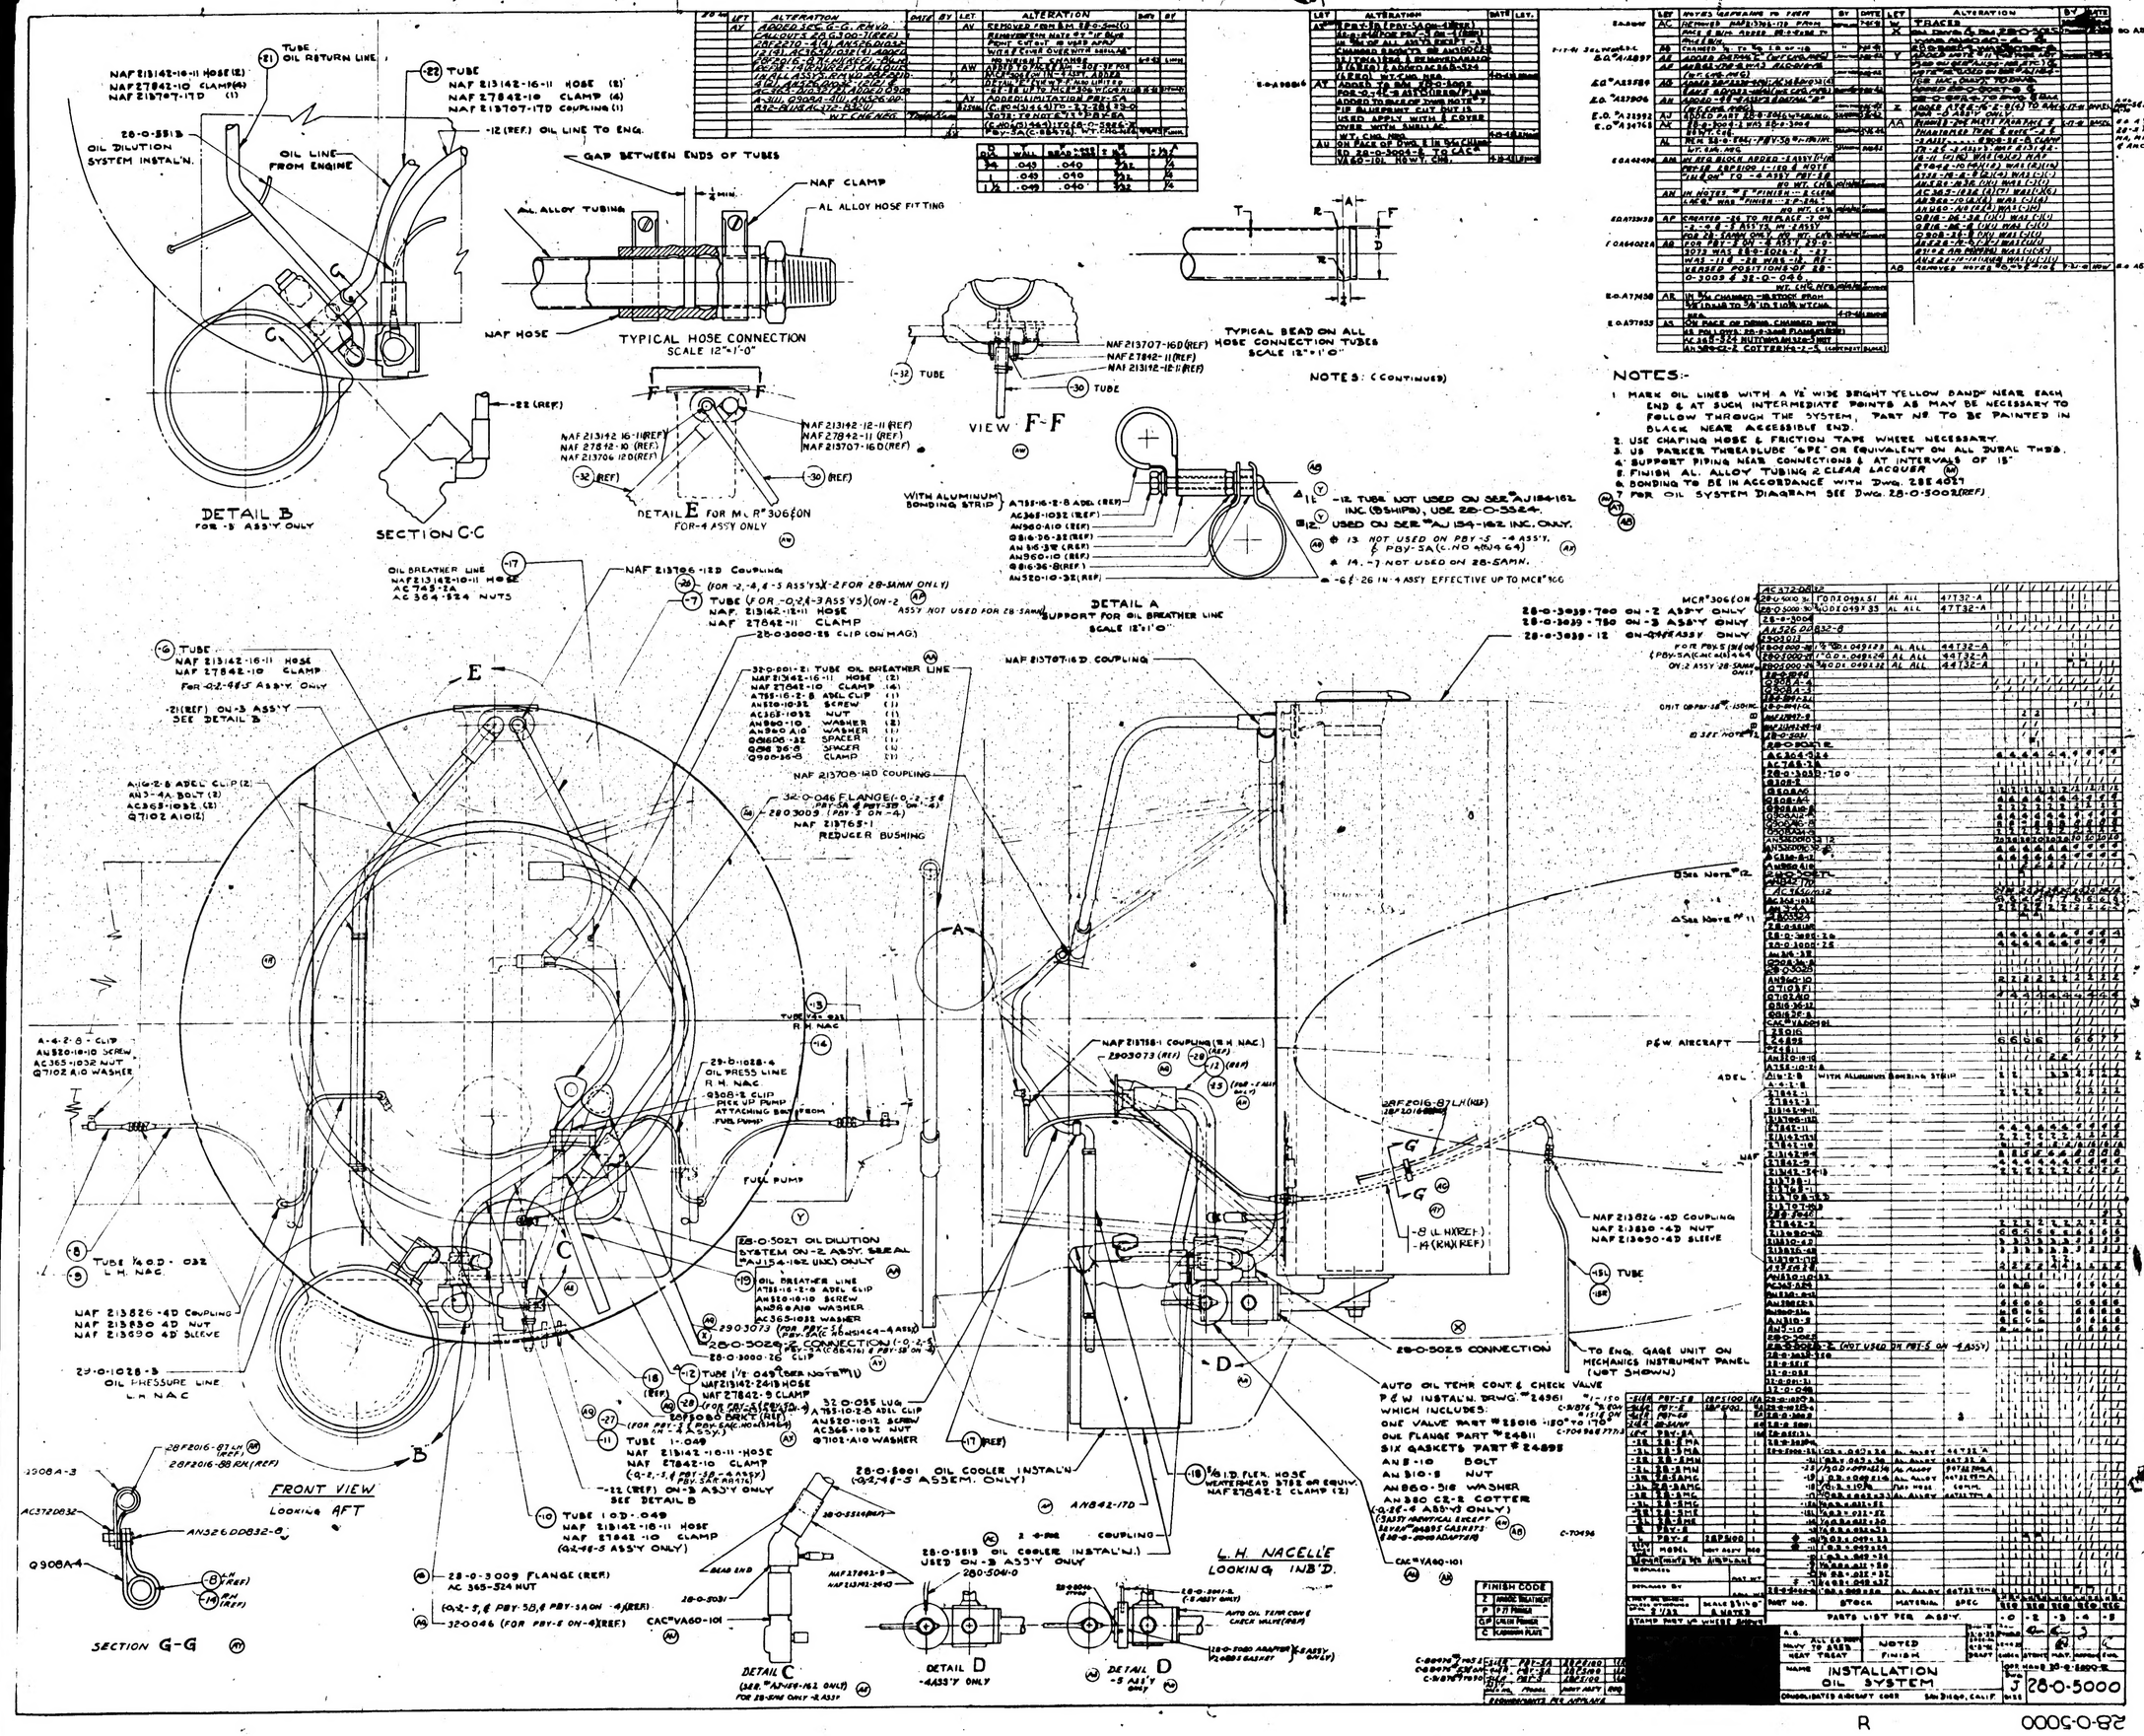

NOTES:-

1. MARK OIL LINES WITH A ½" WIDE BRIGHT YELLOW BAND NEAR EACH END & AT SUCH INTERMEDIATE POINTS AS MAY BE NECESSARY TO FOLLOW THROUGH THE SYSTEM. PART Nº TO BE PAINTED IN BLACK NEAR ACCESSIBLE END.
2. USE CHAFING HOSE & FRICTION TAPE WHERE NECESSARY.
3. US PARKER THREADLUBE "GPE" OR EQUIVALENT ON ALL DUAL THDS.
4. SUPPORT PIPING NEAR CONNECTIONS & AT INTERVALS OF 15".
5. FINISH AL. ALLOY TUBING & CLEAR LACQUER (AN).
6. BONDING TO BE IN ACCORDANCE WITH DWG. 28E4027
7. FOR OIL SYSTEM DIAGRAM SEE DWG. 28-0-5002 (REF).

NOTES: (CONTINUED)

3/4	.049	.040	3/32	1/4	
1	.049	.040	3/32	1/4	
1½	.049	.040	3/32	1/4	